

Lubrication Fittings







Standard Button Head Fittings

Use in rugged applications such as heavy machinery or construction/off-road equipment.

Product #	Thread	Overall Length	Shank Length	Hex Size
AI184	1/8" PTF	3/4"	11/32"	5/8"
AI186	1/4" NPTF	53/64"	27/64"	5/8"
AI188	3/8" NPTF	61/64"	31/64"	3/4"
AI190	1/2" NPTF	1-1/16"	35/64"	7/8"
C69	1/8" NPTF(f)	31/32"	13/32"	5/8"
MI184*	1/8" PTF	3/4"	11/32"	5/8"

FEATURES:

- Head size helps to minimize breakage
- Helps to reduce dirt contamination
- Maximum pressure: 6,000 psi

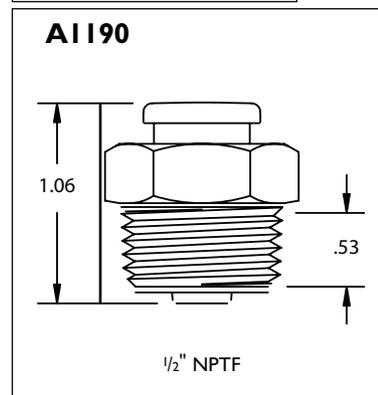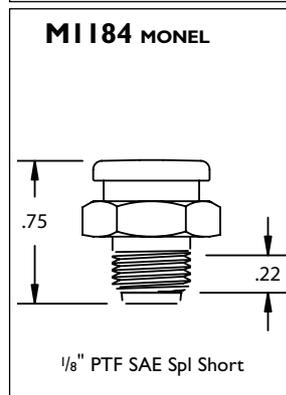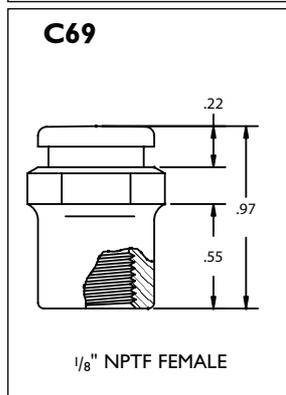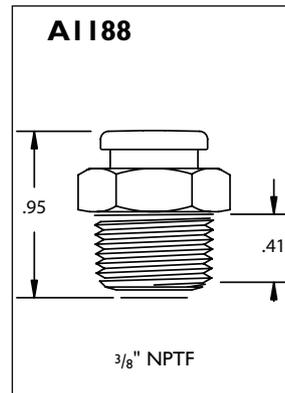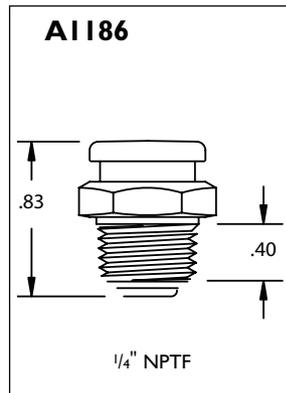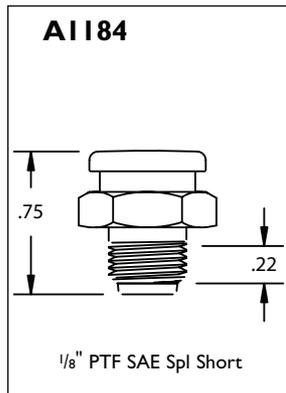

IMPORTANT INFORMATION

* Non-corrosive Monel

NOTE: Geometry modifications and alternate materials available on request.

ALL FITTING ILLUSTRATIONS ACTUAL SIZE

WWW.ALEMITE.COM



Lubrication Fittings




Giant Button Head Fittings

Largest head fitting available for extreme applications.

Product #	Thread	Overall Length	Shank Length	Hex Size
1823-1	1/4" NPTF	1-1/4"	1/2"	7/8"
1822-A1	3/8" NPTF	1-5/16"	9/16"	7/8"
1820-1	1/2" NPTF	1-1/16"	1/2"	7/8"

FEATURES:

- Head size helps to minimize breakage
- Maximum pressure: 15,000 psi
- Check valve helps to reduce contamination

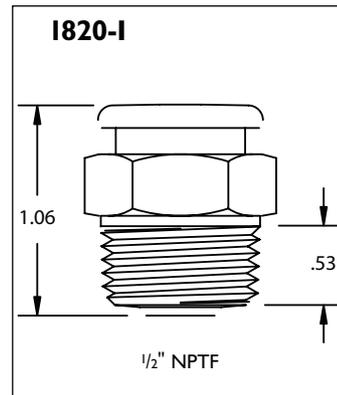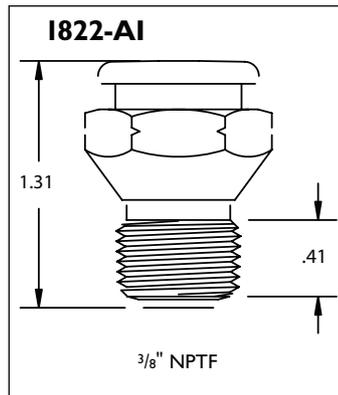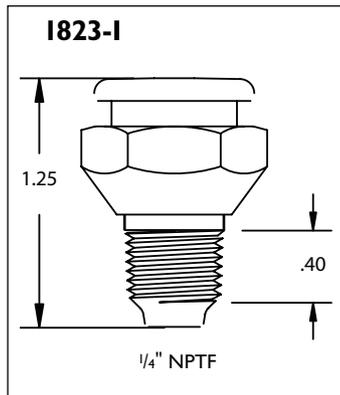

IMPORTANT INFORMATION

NOTE: Geometry modifications and alternate materials available on request.

ALL FITTING ILLUSTRATIONS ACTUAL SIZE

1-866-4-ALEMITE