


DL Series Steam Valve

DL

- Installed on the Ironing equipments independent
- Fully made of heat resistant H class material
- Steam flow rate can be adjustable, Easy to operate
- Electrical parts good water-proof
- Insert pipe, Female-male thread, Adjustable and angle adjustable type for choose




Ordering Code

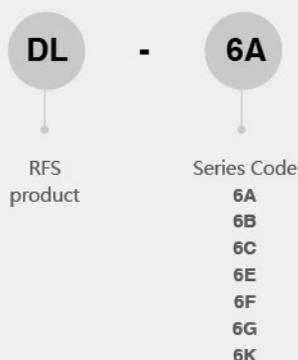


Parameters

Model	DL-6A	DL-6B	DL-6C	DL-6E	DL-6F	DL-6G	DL-6K
Media	Water / Steam / Clean Air						
Working type	2/2 Direct action						
Pattern	Normally close						
Orifice	2.5mm	2.5mm	2.7mm	2.5mm	2.5mm	2.5mm	2.5mm
Connection ports	Φ6Insert pipe, Male G1/8"	Male G1/4"	G1/4"	G1/4"	G1/4"	G1/4"	G1/4"
Working pressure	0~0.8MPa	0~0.8MPa	0~0.8MPa	0~2.5MPa	0~2.5MPa	0~1.0MPa	0~0.8MPa
Max. pressure	1.6MPa	1.6MPa	2.5MPa	3MPa	3MPa	3MPa	2.5MPa
Working temp.	0.1°C ~180°C						
Rated voltage	DC/AC24~240V ±10%						
Power	DC12W/AC15VA			DC20W/AC28VA		DC16W/AC19VA	DC12W/AC15VA
Protection class	IP65						
Insulation class	H class						
Valve body material	Brass						
Seal material	PTFE/FKM						

DL-6E

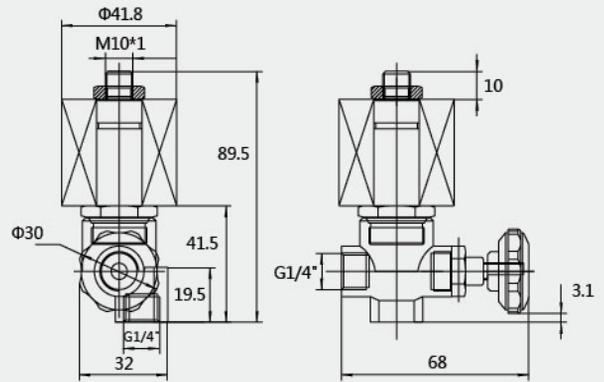

DL-6F

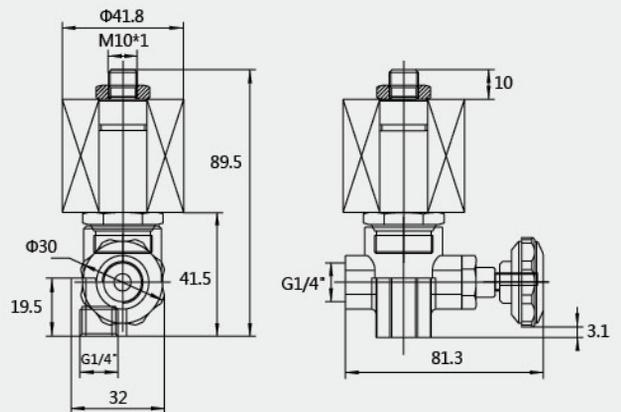

DL-6G

