

One-Shot Lubricators

These small, rugged one-shot lubrication devices dispense a controlled amount of lubricant each time the air starter is engaged. Attached directly to the starter, these lubricators are self-priming lubrication pumps, which can draw oil from as far away as 4 feet.

IR Part Numbers: HDL2 and HDL3

Specifications


- Oil inlet must be full of clean oil
- Operating Air Pressure Range: 40 to 250 psi (2.8 to 17.2 bar)
- Operating Temperature: -30°F to 250°F (-34°C to 121°C)
- Operating Lube Pressure: 0-50 psi
- Lubrication Rate: HDL2 = 1.3 cc HDL3 = 0.4 cc
- All-Viton Seals



HDL2

HDL2/HDL3 DIMENSIONS

IR Part Number	Dim. A in. (mm)	Dim. B in. (mm)
HDL2	2.99 (76)	3.55 (90.2)
HDL3	3.11 (79)	3.67 (93.2)

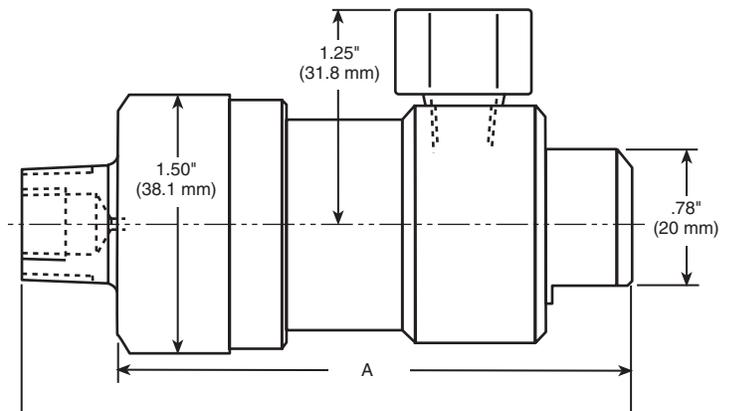

One-Shot Lubricators Genuine Ingersoll-Rand Replacement Kits


Tune Up Kit Part Number	Description
HDL2-TK1	HDL2 Tune Up Kit
HDL3-TK1	HDL3 Tune Up Kit



HDL2-TK1 Parts



HDL3-TK1 Parts

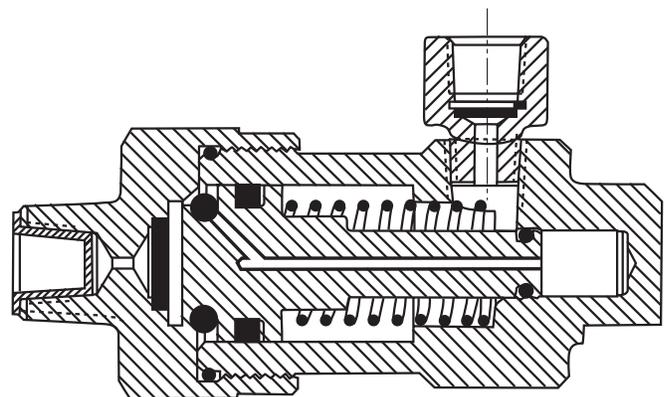

HDL2/HDL3 Cross Section