



## P77 Series Controls for High Pressure Applications Catalog Page

LIT-1901043

2020-04-22

### Description

The P77 Series Controls for high pressure Applications are designed primarily for high pressure cut-out control, pump-down control, condenser fan cycling, and capacity control on commercial refrigeration and air-conditioning applications.

These controls are available in several pressure ranges and are compatible with most common refrigerants. They may also be used on other non-corrosive fluid applications. Controls also are available in several different electrical ratings and Single-Pole, Double-Throw (SPDT) switch configurations.

Refer to the *P77 and P78 Series Controls for Single and Dual Pressure Applications Product Bulletin (LIT-12012399)* for important product application information.

### Features and benefits

#### **Splash-proof enclosure**

Built to provide long lasting, rugged protection for internal components.

#### **Sight-set calibrated pressure adjustment**

Displays a visible pressure scale, fully adjustable through the range without removing the cover.

#### **Manual reset lockout option**

Provides trip-free lockout that cannot be overridden or reset until pressure returns to a specified level.

#### **Generous wiring space**

Provides ample space for easy wiring and maintenance.




P77AAA, P77BEA


## Applications

The P77 Series Controls for high pressure applications are designed for single pressure control of commercial refrigeration and air-conditioning applications.

**Figure 1: P77 Pressure Controls with 7/16-20 UNF 6 mm (1/4 in.) flare fitting dimensions, mm (in.)**

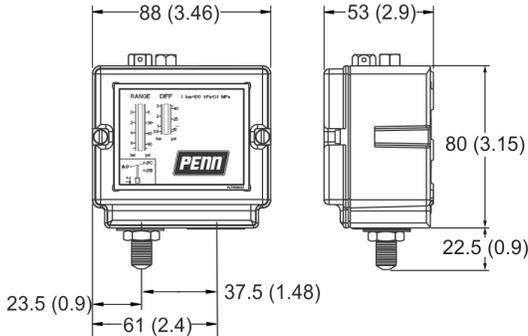

**Figure 2: Capillary connector dimensions, mm (in.)**

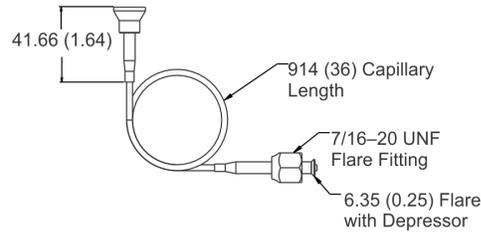

## Repair information

If the P77 Series Pressure Control fails to operate within its specifications, replace the unit. For a replacement P77 Control, contact the nearest Johnson Controls® representative.

## Selection chart

**Table 1: P77 Series Controls for high pressure applications selection chart**

Model number	Individual pack	Bulkpack	Pressure connection	Switch action	Range bar (psi)	Differential bar (psi)	Maximum bellows pressure bar (psi)
P77AAA	-13500C	-13500D	7/16-20 UNF6 mm (1/4 in.) flare fitting	SPDT	3 to 30 (44 to 435)	3 to 12 (44 to 174)	33 (479)
	-15500C	-15500D	914 mm (36 in.) capillary with 6 mm (1/4 in.) flare fitting				
P77BEA	-13500C	-13500D	7/16-20 UNF6 mm (1/4 in.) flare fitting				
	-15500C	-15500D	914 mm (36 in.) capillary with 6 mm (1/4 in.) flare fitting			Manual reset <sup>1</sup>	

1 The control cannot be reset until the pressure reduces 3 bar (44 psi) or lower below the high cut-out point.

## Technical specifications

**Table 2: P77 Series electrical ratings**

	UL60730 <sup>1</sup>							
	24		120		208		240	
	-		Primary contact	Secondary contact	Primary contact	Secondary contact	Primary contact	Secondary contact
Volts AC 50/60 Hz	-		Primary contact	Secondary contact	Primary contact	Secondary contact	Primary contact	Secondary contact
Horsepower	-		1	0.33	1	0.75	1	1
Full Load Amperes	-		16	7.2	9.2	7.6	8	8
Locked Rotor Amperes	-		96	43.2	55.2	45.6	48	48
Resistive Amperes	16	16	8	10	10	8	10	8
Pilot Duty VA	125	720	720	720	720	720	720	720

1 When the primary contact is A-C, the secondary contact is A-B. When the primary contact is A-B, the secondary contact is A-C.

**Table 3: P77 Series applications**

Specification	Description
Product switch action	Single-Pole, Double-Throw (SPDT)
Pressure connection	7/16-20 UNF for 6 mm (1/4 in.) SAE external flare fitting), or 914 mm (36 in.) capillary with 6 mm (1/4 in.) flare fitting
Ambient conditions	Temperature: -40 to 60°C (-40 to 140°F) Humidity: 0 to 95% R.H. non-condensing
Enclosure	Type 1: cast aluminum

**Table 3: P77 Series applications**

Specification	Description
Dimensions (H x W x D)	Type 1 enclosure: 88 x 80 x 53 mm (3.48 x 3.15 x 2.09 in.)
Approximate shipping weight	Individual pack: (Type 1 enclosure): 0.5 kg (1.1 lbs) Bulk pack: (Type 1 enclosure in multiples of 35 controls): 19 kg (41.88 lbs)
Compliance	cULus Listed; UL 60730, File SA516

**Table 4: P77 for high pressure applications UL conformity declaration information**

Specification	Description
Purpose of control	Pressure operating control: Automatic reset controls Pressure cut-out: Manual reset controls
Construction of control	Electromechanical
Number of cycles	Automatic: 30,000 Cycles Manual Reset: 6,000 Cycles
Method of mounting control	Independently-mounted control
Type 1 or Type 2 action	Automatic: Type 1; Type 1.C (Micro-Interruption) Manual Reset: Type 2
Pollution degree	Category 3
Heat and fire resistance category	N/A
Rated impulse voltage	4,000 V
Ball pressure temperature	N/A
Field wiring rating	90°C (194°F)
Maximum overpressure	33 bar (479 psi)
Cover screw torque requirements instruction	Tighten enclosure screws to: 1.1–1.4 N·m (10–12 in-lb)

## Product warranty

This product is covered by a limited warranty, details of which can be found at [www.johnsoncontrols.com/buildingswarranty](http://www.johnsoncontrols.com/buildingswarranty).

Contact Johnson Controls:  
[www.johnsoncontrols.com/contact-us](http://www.johnsoncontrols.com/contact-us)

## Software terms

**Use of the software that is in (or constitutes) this product, or access to the cloud, or hosted services applicable to this product, if any, is subject to applicable terms set forth at [www.johnsoncontrols.com/techterms](http://www.johnsoncontrols.com/techterms).** Your use of this product constitutes an agreement to such terms.

## Single point of contact

APAC	Europe	NA/SA
JOHNSON CONTROLS C/O CONTROLS PRODUCT MANAGEMENT NO. 32 CHANGJIANG RD NEW DISTRICT WUXI JIANGSU PROVINCE 214028 CHINA	JOHNSON CONTROLS WESTENDHOF 3 45143 ESSEN GERMANY	JOHNSON CONTROLS 507 E MICHIGAN ST MILWAUKEE WI 53202 USA

## Contact information

Contact your local branch office:  
[www.johnsoncontrols.com/locations](http://www.johnsoncontrols.com/locations)

