

US系列二位二通顶尖式蒸汽电磁阀 2/2 WAY PILOT-OPERATED STEAM SOLENOID VALVES



■ US-15

■ US-20

■ US-25

■ US-40

■ US-50

订购码 Ordering Code

US - 15 - SS - F - AC220V

二位二通电磁阀
2/2 Way
Solenoid Valve


接管口径
Port Size
15: 1/2"
20: 3/4"
25: 1"
35: 1 1/4"
40: 1 1/2"
50: 2"

阀体材料
Stainless Steel
S.S.: 不锈钢
Brass: 黄铜

空白: 螺纹
F: 法兰
Blank: Thread
F: Flange

标准电压
Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

图形符号 Graphic Symbol




规格 Specification

型号/Model	US-15	US-20	US-25	US-35	US-40	US-50
工作介质/Working Medium	空气、水、蒸汽 / Air, Water, Steam					
动作方式/Operation	先导式 / Pilot operated					
型式/Acting Type	常闭式 / Normally Closed					
流量孔径/Orifice Size (mm)	17	22	30	48	50	50
CV值/CV Value	4.8	12	20	48	48	48
接管口径/Port Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
使用流体粘滞度/Operation Fluid Viscosity	20 CST以下 (Below)					
使用压力/Operating Pressure	空气、水、蒸汽 / Air, Water, Steam: 0.1~1.5Mpa					
最大耐压力/Max. Pressure Resistance	1.5Mpa					
工作温度/Operating Temperature	-5 ~ 185°C					
使用电压范围/Voltage Range	±10%					
本体材质/Material of Body	黄铜 / Brass					
油封材质/Material of Oil Seal	PTFE					

US系列二位二通顶尖式蒸汽电磁阀 2/2 WAY PILOT-OPERATED STEAM SOLENOID VALVES


外形图 Overall Dimension

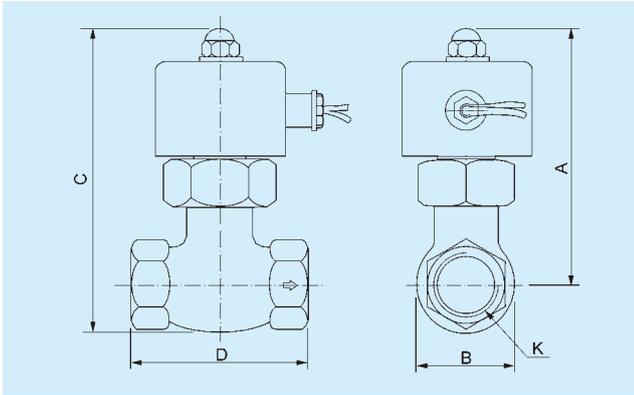


尺寸表 Dimension Sheet

型号 Model	A	B	C	D	K
US-10	125	42	146	84	ZG3/8"
US-15	125	42	146	84	ZG1/2"
US-20	125	42	146	84	ZG3/4"
US-25	136	52	162	94	ZG1"
US-35	148	74	183	111	ZG1 1/4"
US-40	147	74	183	111	ZG1 1/2"
US-50	176	86	223	165	ZG2"

流量图 Flow Chart

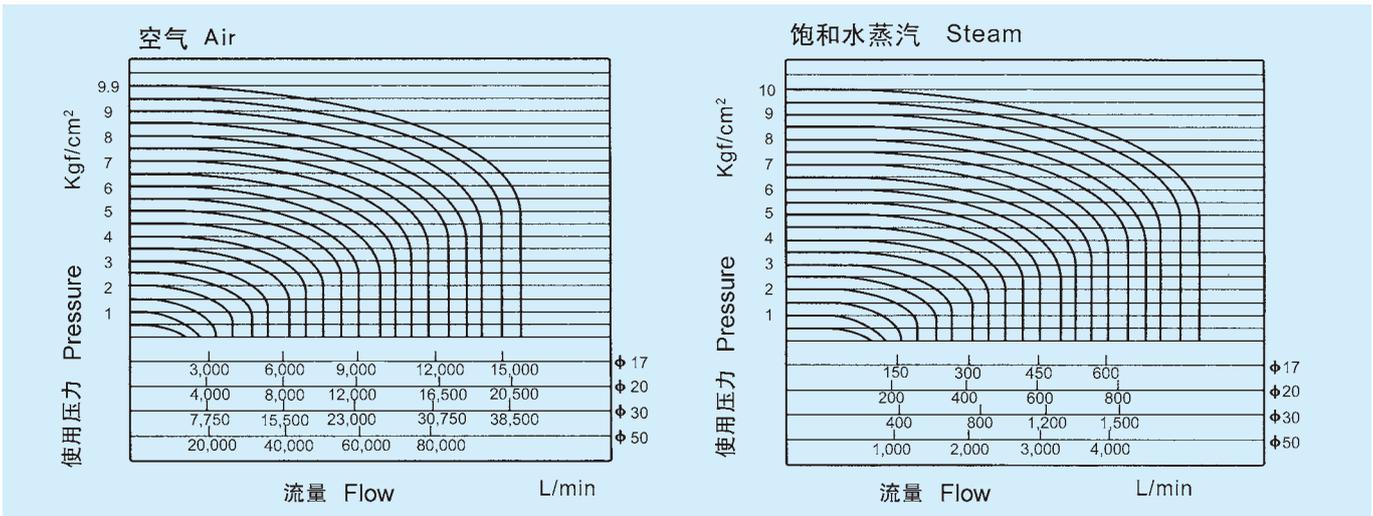

内部结构 Inside Structure

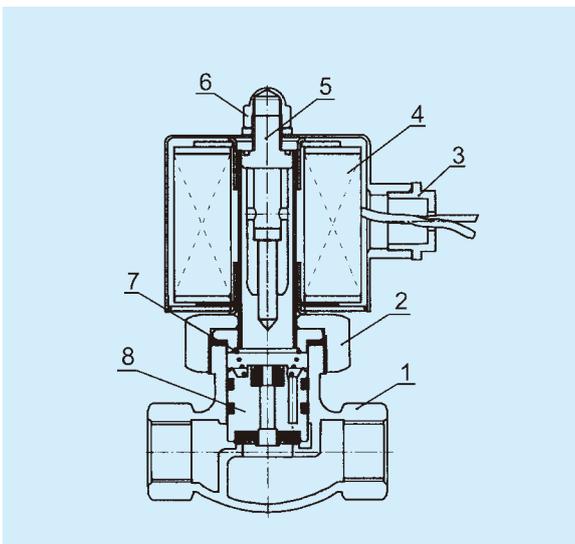

序号 NO.	名称 Name
1	阀体/Valve body
2	六角螺母/Hexagonal nut
3	出线护套/Loire cover
4	线圈组合/Coil combination
5	可动铁组合/Movable core
6	螺母/Nut
7	压缩弹簧/Compressed spring
8	活塞/Piston