


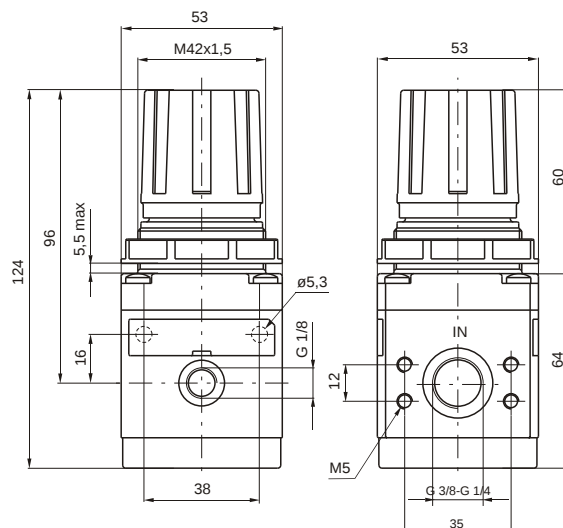

## Construction and working characteristics


- Diaphragm pressure regulator with relieving.
- Balanced poppet.
- Lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Two pressure gauge connections with plug complete of seal.
- Panel mounting bracket.

## Technical characteristics


|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Connections                | G 1/4" - G 3/8"                                   |
| Max. inlet pressure        | 13 bar - 1,3 MPa                                  |
| Max. ambient temperature   | 50°C                                              |
| Pressure gauge connections | G 1/8"                                            |
| Weight                     | gr. 390                                           |
| Pressure range             | 0 - 2 bar<br>0 - 4 bar<br>0 - 8 bar<br>0 - 12 bar |
| Assembly position          | Any                                               |
| Wall fixing screws         | M5                                                |
| Max. fitting torque        | 25 Nm                                             |

### Flow rate curves

Inlet pressure (7 bar)

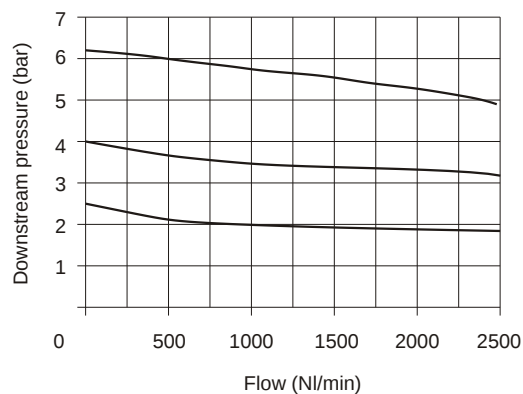


### Adjustment characteristics

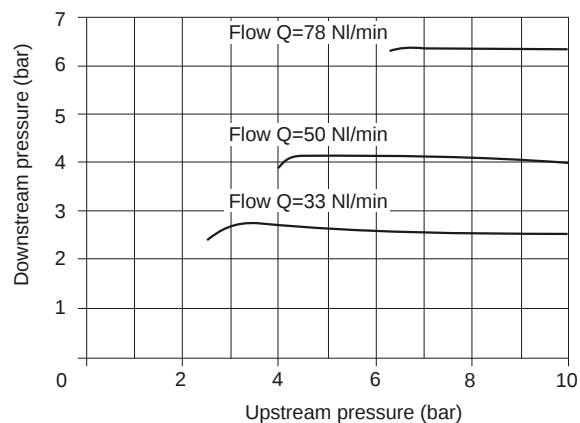


## Ordering code

**17202**

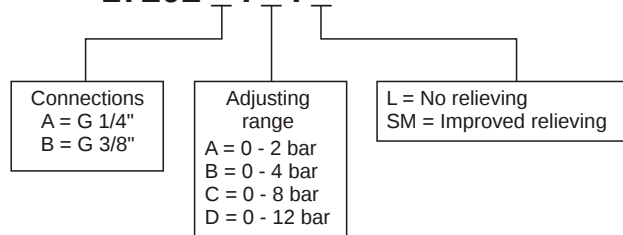

Example: 17202A.C

Example: **17202A/C**  
Pressure regulator with G 1/4" connections, adjusting range 0 - 8 bar with relieving.

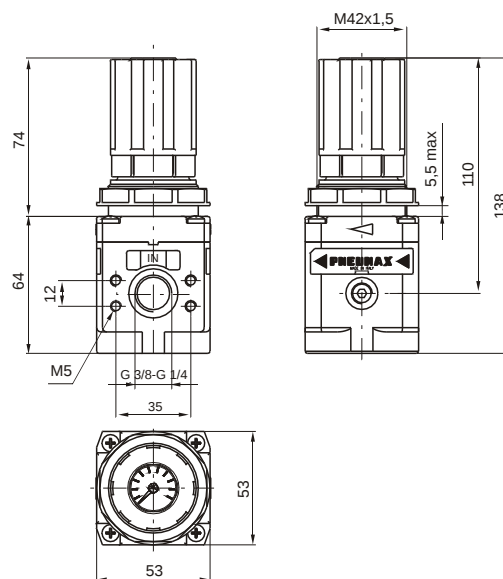

## Construction and working characteristics


- Diaphragm pressure regulator with relieving.
- Pressure gauge included on the top of adjusting knob.
- Balanced poppet.
- Lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Panel mounting bracket.

## Technical characteristics


|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Connections                | G 1/4" - G 3/8"                                   |
| Max. inlet pressure        | 13 bar - 1,3 MPa                                  |
| Max. ambient temperature   | 50°C                                              |
| Pressure gauge connections | G 1/8"                                            |
| Weight                     | gr. 440                                           |
| Pressure range             | 0 - 2 bar<br>0 - 4 bar<br>0 - 8 bar<br>0 - 12 bar |
| Assembly position          | Any                                               |
| Wall fixing screws         | M5                                                |
| Max. fitting torque        | 25 Nm                                             |

Flow rate curves

Inlet pressure (7 bar)

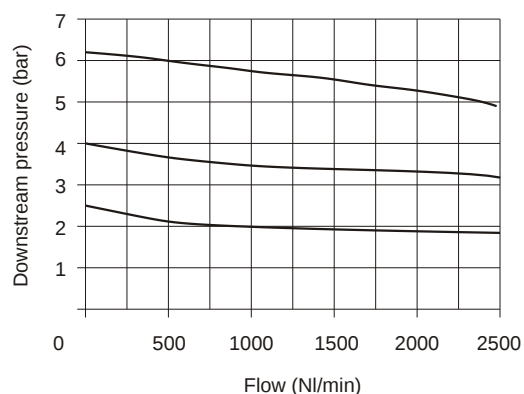


Adjustment characteristics

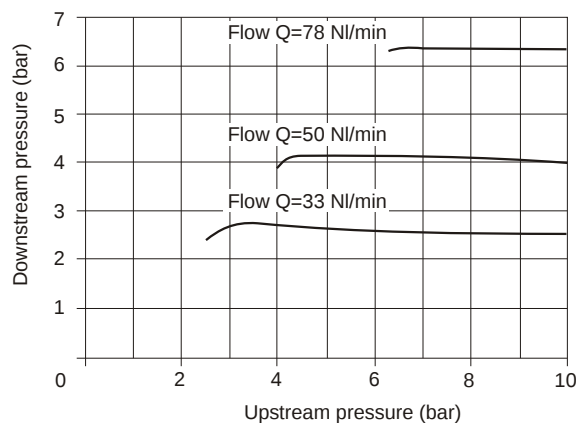

Ordering code

**17222**

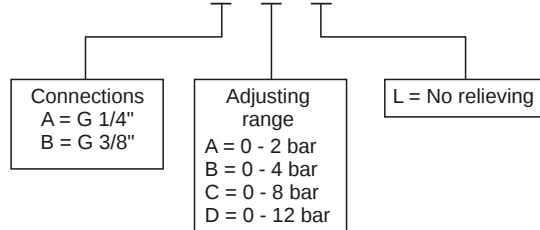

Example: **17222A.C**  
 Pressure regulator with G 1/4" connections, adjusting range 0 - 8 bar with relieving.